




922



222

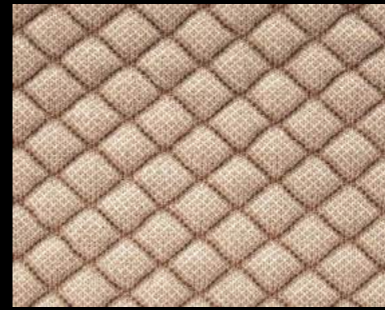

262



182



722



642



772



692



532



662




682



672



422

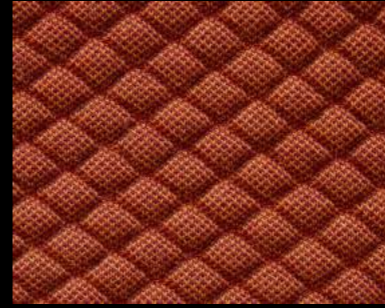

472



972

Mosaic 2

cat. Maxi

27% wool - 9% polyamide - 12% polyester -
6% elasthan - 46% polyester filling
Flame retardant - 100.000 Martindale

Mosaic 2

Technical details

Composition	27% wool - 9% polyamide - 12% polyester - 6 elasthan - 46% polyester filling
Weight	Gr./ml. 1080
Abrasion test	Martindale - ISO 12947-2: 100.000 rubs
Lightfastness	ISO 105-B02: 6/7
Pilling	ISO 12945-2: 4/5
Fastness to rubbing	ISO 105-X12: 4/5
Flame retardant	EN 1021-1/2 BS 5852 part 1 DIN 4102-B2 US Cal. Tech. Bull. 117-2013 IMO FTP Code 2010 part 8
Features	No use of brominated flame retardants Stretch material
Environment	No use of AZO dyes, which may split off carcinogenic acryl amines No use of dyes containing more heavy metals than allowed No content of formaldehyde No use of brominated flame retardants Complies with REACH regulation