


Aurea - E www.fluko.it




- Composition: 72% PVC - 3% PU - 25% COTTON
- Abrasion: EN ISO 15470-2 50.000 Cycles Martindale
- Light Resistance - Xenotest: UNEN ISO 105-B02-6
- Fire proof: IMO resolution A.852 (16); 1989; BS 5852 CRB5; BS 5852-1 EN9171; EN 1021-2; UNI 9175
- Maintenance: dépoussiérer et essayer avec un chiffon doux humide.

Cuir sellier




- Composition: 100% Grain Leather, Italian tannery
- Light Resistance - Xenotest: UNI EN ISO 105-B02-6
- Fire proof: CAL TB 117-00, Section E - part 1; BS 5852-20 section 4 (CRIB 5); UNI 91-75 Classe 2M
- Maintenance: dépoussiérer et essayer avec un chiffon doux humide.

Cuir - P




- Composition: 100% Top Grain Leather, Italian tannery
- Light Resistance - Xenotest: UNI EN ISO 105-B02-6
- Fire proof: BS EN 1021 Part 1, BS 1021 Part 2, BS 5852 Part 2 (with special fire-retardant padding)
- Maintenance: essayer avec un chiffon doux et sec.

Fortezza 93 - FO www.primafabrics.it

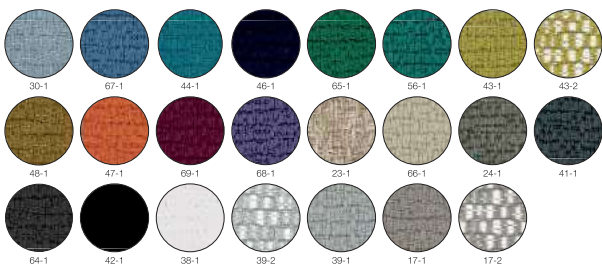

- Composition: 100% Polyethylene
- Abrasion: UNI EN ISO 12947 35.000 rub/cicl
- Seam strength: BS 2543
- Pilling: UNI EN ISO 12945-2
- Colour fastness Dry Rubbing: UNEN ISO 105-X12
- Colour fastness Wet Rubbing: UNEN ISO 105-X12
- Light fastness: UNEN ISO 105-B02; UNI EN ISO 105-B04
- Colour fastness to Sea Water: UNEN ISO 105-B02-1998
- Colour fastness to Chlorinated Water: UNEN ISO 105-E02-010
- Flammability: UNI 8456 - 9174
- CLASS 1 - ITALIAN FIRE SAFETY CLASSIFICATION
- PASS, BS EN 1021-1:1994
- SOURCE 0 - CIGARETTE TEST
- PASS, BS EN 1021-2:1994
- SOURCE 1 - BUTANE FLAME
- PASS ON W/FROM TB 117 2013; SECTION 1 POSITIVE, BT ACCORDING TO DIN 4102; PART 1 MAY 1999
- NFPA 2002013 - CLASS 1, MO 2010 FTP CODE PART 8
- Resolution M2C 307/89
- Cigarette and Match Test, EN 13773 (2004) CLASS 1
- Maintenance: essayer avec un chiffon doux et sec.


Progarden -GR www.govanardi.com



- Composition: 100% yarn dyed acrylic
- Martindale (ISO 12947-2): 15.000 cycles
- Dimensional change after washing at 40°C and drying (warp/weft) (ISO 5077): ± 2%/0% - Breaking strength (warp/weft) (ISO 13934-1): 200/70 daN
- Elongation at break (warp/weft) (ISO 13934-1): 22%/25%
- Tear strength (warp/weft) (ISO 13837-1): 7/3,7 daN
- Resistance to seam (warp/weft) (ISO 13935-1): 50/50 daN

- Air permeability (ISO 9237): 65 l/m2/s
- Finishing: Water repellent Teflon® Scotchgard treatment, dirt repellant and anti-mould treatment
- Spray Test (ISO 4920): 4 out of 5
- UV Colour fastness (ISO 105-B02): 5/8 out of 8
- Colour fastness to weather (ISO 105-B04): 5/5 out of 8
- Colour fastness after washing at 40°C (ISO 105-C06): 5 out of 5
- Maintenance: dépoussiérer et essayer avec un chiffon doux humide.


Silvertex - SX www.sprading.eu



- Composition: 100% Vinyl / Polyester Backing
- Abrasion: >300.000 cycles Martindale (EN ISO 12947:1999 Part 2)
- UV Resistance: ISO 105-B04 ± 4/5 (New Scale) [EC 105-B02 ± 7/8 (Blue Wool Scale)]
- Flame Retardancy: EU: EN 1021 Part 1 & 2; DE: DIN 4102; BS ECE Regulation No 118/03; R118.02 Annexes 6, 7 & 8; ES: UNE 23.727-90 1RM.2; FR: NF P 92-503/M2; IT: UNI 9175 (1987) / UNI 9175/FA1 (1994)

- Classe 1 IM (UNO EMME), AT: ÖNORM B 3825, Gruppe 1 - Schwerebrennbare Verhalten, AT: ONORM A 2930 Teil 1, Quatmbildungsklasse O1 - schwachqualmend, MO FTP 2010 Code MSC-307 (89) Part 6.3.1.3.2, (MED) Marine Equipment Directive (in its current valid version), EN 71-2:2009+A1:2007 - Safety of Toys - Parte 2: Flammability, US: CAL TB 117-2013, Section E, FMVSS 302, 25/853
- Maintenance: dépoussiérer et essayer avec un chiffon doux humide.


Maglia - MG www.sprading.eu



- Composition: Vinyl 100%
- Abrasion: >100.000 cycles Martindale (EN ISO 12947:1999 Part 2)
- Fire Proof: EN 1021 Part 1 & 2, UNE 23.727-90 1RM.2, NF P 92-503/M2, DIN 4102 BS, UNI 9175 (1987) / UNI 9175/FA1 (1994) Classe 1 IM (UNO1 EMME), ONORM B 3825

- Gruppo 1 - Schwerebrennbare Verhalten, ONORM A 2930 Teil 1, Quatmbildungsklasse O1 - schwachqualmend, MO FTP 2010 Code MSC-307 (89) Part 6.3.1.3.2, FMVSS 302, US: FAR 25/853, (MED) Marine Equipment Directive (in its current valid version), ECE R118.02 (replaces Directive 95/28/CE) Annexes 6, 7 & 8, EN 71-2:2009+A1:2007 - Safety of Toys - Parte 2: Flammability, CAL TB 117-2013, Section E
- Light Resistance: UV-Resistance XENOTEST DIN 54004/NTC 1479
- Maintenance: dépoussiérer et essayer avec un chiffon doux humide.

Mesh - R www.plastiflex.com



- Composition: Polyvinil 70% - Polyester 30%
- Warp Tensile Strength: 310Kg/5cm
- Weft Tensile Strength: 270Kg/5cm
- Fire resistant on request
- Maintenance: dépoussiérer et essayer avec un chiffon doux humide.

- Maintenance: dépoussiérer et essayer avec un chiffon doux humide.